




Ⓢ Strut Channel

Material: Steel **Finish:** HDG,Pre-Galvanized
Application:for use to support conduits, fixtures, and ventilation systems form beams and other structural systems

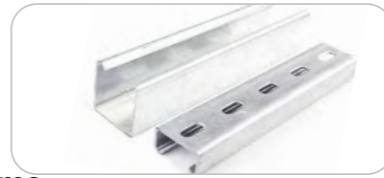


Cross Section		Wall Thickness		Length		Available Option			
Metric	US	Metric	US	Metric	US	Model	Surface Finish	Surface Finish	Surface Finish
41mmX41mm	1-5/8" X 1-5/8"	1.5mm	16Ga.	3.05m	10ft	Slotted	Plain	Pre-Galvanized	Hot Dip
41mmX41mm	1-5/8" X 1-5/8"	1.9mm	14Ga.	3.05m	10ft	Slotted	Plain	Pre-Galvanized	Hot Dip
41mmX41mm	1-5/8" X 1-5/8"	2.7mm	12Ga.	3.05m	10ft	Slotted	Plain	Pre-Galvanized	Hot Dip
41mmX41mm	1-5/8" X 1-5/8"	2.0mm	0.079"	3.05m	10ft	Slotted	Plain	Pre-Galvanized	Hot Dip
41mmX41mm	1-5/8" X 1-5/8"	2.5mm	0.098"	3.05m	10ft	Slotted	Plain	Pre-Galvanized	Hot Dip
41mmX21mm	1-5/8"*13/16"	1.5mm	16Ga.	3.05m	10ft	Slotted	Plain	Pre-Galvanized	Hot Dip
41mmX21mm	1-5/8"*13/16"	1.9mm	14Ga.	3.05m	10ft	Slotted	Plain	Pre-Galvanized	Hot Dip
41mmX21mm	1-5/8"*13/16"	2.7mm	12Ga.	3.05m	10ft	Slotted	Plain	Pre-Galvanized	Hot Dip
41mmX21mm	1-5/8"*13/16"	2.0mm	0.079"	3.05m	10ft	Slotted	Plain	Pre-Galvanized	Hot Dip
41mmX21mm	1-5/8"*13/16"	2.5mm	0.098"	3.05m	10ft	Slotted	Plain	Pre-Galvanized	Hot Dip

Tolerances: Length ± 0.25" (6.35 mm)
Note: Customized thickness or length will also be produced upon special request

Ⓢ Riel RC

Material: Steel
Application: for use with RC Clamp to support EMT and Conduits

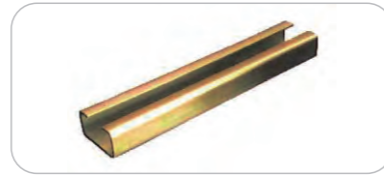

Trade Size	Thickness	Length	Available Option			
			Model	Surface Finish	Surface Finish	Surface Finish
19mmX35mm	1.2/1.5/2.0mm	1meter 3meter	Color Zinc	White Zinc	White Zinc	White Zinc

Ⓢ Riel Din


Material: Steel
Application: for component installation together with end brackets for holding and isolating the components.



Trade Size	Thickness	Short-circuit Strength	Length	Available Option			
				Model	Surface Finish	Surface Finish	Surface Finish
35mmX7.5mm	1mm	16mm ²	1meter 2meter	Slotted	Plain	Color Zinc	White Zinc

Ⓢ Beam Clamp

Material: Malleable Iron
Application: Clamps on beam, girder or similar structure to provide a mounting base

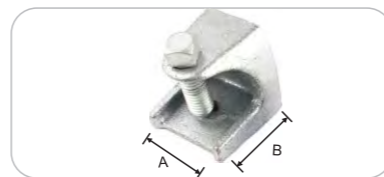

TOPELE#	Trade Size	Load Rating	Master QTY	Dim A (inch)	Dim B (inch)
BC01	1"	250 LBS	200	1.000	1.250
BC02	2"	750 LBS	50	2.000	2.000
BC03	2-1/2"	1250 LBS	30	2.500	2.375

Note: Load Ratings are based on bottom hole of Beam Clamp.

Ⓢ Threaded Rod

Material: Steel
Application:brings versatility to jobsite, form hanging and mounting to retrofiting and bracing




Trade Size	Diameter		Thread Size	Specification	Length (Meter)	Strength (PSI)		Each Bundle	
	Inch	mm				Yield	Tensile	QTY	Wt.(kg)
1/4"	0.250	6.35	1/4"-20	ASTM A307 Grade 2	3	40,000	60,000	50	25
3/8"	0.375	9.53	3/8"-16	ASTM A307 Grade 2	3	40,000	60,000	25	30
1/2"	0.500	12.70	1/2" -13	ASTM A307 Grade 2	3	40,000	60,000	10	22
M6	0.236	6	1	DIN 975 Class 4.6	3	34,000	58,000	50	23
M8	0.315	8	1.25	DIN 975 Class 4.6	3	34,000	58,000	25	20
M10	0.394	10	1.5	DIN 975 Class 4.6	3	34,000	58,000	20	25
M12	0.472	12	1.75	DIN 975 Class 4.6	3	34,000	58,000	15	29
M14	0.551	14	2	DIN 975 Class 4.6	3	34,000	58,000	10	25
M16	0.630	16	2	DIN 975 Class 4.6	3	34,000	58,000	10	34
M18	0.709	18	2.5	DIN 975 Class 4.6	3	34,000	58,000	5	23
M20	0.787	20	2.5	DIN 975 Class 4.6	3	34,000	58,000	5	29
M22	0.866	22	2.5	DIN 975 Class 4.6	3	34,000	58,000	3	22
M24	0.945	24	3	DIN 975 Class 4.6	3	34,000	58,000	3	25
M27	1.063	27	3	DIN 975 Class 4.6	3	95,000	120,000	3	32
M30	1.181	30	3.5	DIN 975 Class 4.6	3	95,000	120,000	2	27
M33	1.299	33	3.5	DIN 975 Class 4.6	3	95,000	120,000	1	17
M36	1.417	36	4	DIN 975 Class 4.6	3	95,000	120,000	1	19

Note: Customized length will also be produced upon special request

Ⓢ Channel Nut with Spring

Material: Steel
Application:for use to attach strut fittings to the open fash of channels

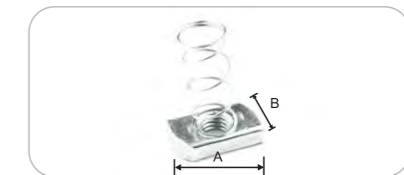

TOPELE#	Trade Size	Shelf QTY	Master QTY	Dim A (mm)	Dim B (mm)
CNS1	M6	*	200	1.339	0.748
CNS2	M8	*	200	1.339	0.748
CNS3	M10	*	200	1.339	0.748
CNS4	M12	*	200	1.339	0.748
CNS9	1/4"	*	200	1.339	0.748
CNS10	5/16"	*	200	1.339	0.748
CNS11	3/8"	*	200	1.339	0.748
CNS12	1/2"	*	200	1.339	0.748

Note: If you need short type or without spring,please contact us.

Ⓢ Top Beam Clamp

Material: Malleable Iron
Application:Clamps on beam, girder or similar structure to provide a mounting base



TOPELE#	Trade Size	Shelf QTY	Master QTY	Dim A (mm)	Dim B (mm)
BC11	M8	1200LBS	100	19.30	20.00
BC12	M10	2500LBS	100	20.40	23.00
BC13	M12	3500LBS	100	26.60	27.00